# Dome Mechanical Seal Fiber Optic Splice Closure (FOSC)

**HTSC-302** 

(OMV-302)

**Installation Manual** 

# 1. Scope of application

This Installation Manual suits for the Fiber Optic Splice Closure (Hereafter abbreviated as FOSC), as the guidance of proper installation.

The scope of application is: aerial, underground, pipeline, hand-holes. The ambient temperature ranges from  $-40^{\circ}$ C to  $65^{\circ}$ C.

## 2. Basic structure and configuration

2.1 Dimension and capacity

Outside dimension (Height x Diameter)	288mm×178mm
Weight (excluding outside box)	1800g—1910g
Number of inlet/outlet ports	4 pieces
Diameter of fiber cable	Φ8mm~Φ16 mm
Capacity of FOSC	Bunchy: 4-48 (cores)

2.2 Main components

	2.2 Wain components				
No.	Name of components	Quantity	Usage	Remarks	
1	FOSC cover	1 piece	Protecting fiber cable	Height x Diameter	
			splices in whole	208mm x 132mm	
2	Fiber optic splice tray	Max. 4 trays	Fixing heat shrinkable	Suitable for:	
		(bunchy)	protective sleeve and	Bunchy:4,6,8,12,(cores)	
	(FOST)		holding fibers		
3	Fiber holding tray	1 pcs	Holding fibers with		
	4		protective coat		
4	Base	1set	Fixing internal and external		
			structure		
5	Plastic hoop	1 set	Fixing between FOSC		
			cover and base		
6	Seal fitting	1 piece	Sealing between FOSC		
4			cover and base		
7	Pressure testing valve	1 set	After inject air, it is used for	Configuration as per	
			pressure testing and sealing	requirement	
			testing		
8	Earthing deriving	1 set	Deriving metal parts of	Configuration as per	
			fiber cables in FOSC for	requirement	
	device		earthing connection		

Tel.:8-37-451616

Fax.:8-37-310246

www.komutacija.com

www.zaliasis-namas.lt

2.3 Main accessories and special tools

No.	Name of accessories	Quantity	Usage	Remarks
1	Heat shrinkable		Protecting fiber splices	Configuration as per
	protective sleeve			capacity
2	Nylon tie		Fixing fiber with protective coat	Configuration as per
				capacity
3	Earthing wire	1 piece	Putting through between earthing	To put through as per
			devices	actual requirement
4	Abrasive cloth	1 piece	Scratching fiber cables	
5	Labeling paper	1 piece	Labeling fibers	
6	Special wrench	2 pieces	Installing and tightening nut of	
			reinforced core and nut (plastic)	
			of inlet/outlet tube	
7	Measuring paper	1 piece	To measure perimeter, of which	To measure perimeter
			its diameter is enlarged with seal	with the corresponding
			tape	measuring paper
8	Seal tape	1 ring	Enlarging diameter of fiber	Configuration as per
			cable which fits in with gasket	specification
			ring.	
9	Insulation tape	1 ring	Enlarging diameter of fiber	
			cable for easy fixing	
10	Metal hoop	1 set	For wall mounting and pole	
			hugging	
11	Buffer tube	decided	Hitched to fibers and fixed with	Configuration as per
		by	FOST, managing buffer.	requirement
	4	customers		
12	Desiccant	1 bag	Put into FOSC before sealing for	
			desiccating air	

# 3. Necessary tools for installation

# 3.1 Supplementary materials (to be provided by operator)

Name of materials	Usage	
Scotch tape	Labeling, temporarily fixing	
Ethyl alcohol	Cleaning	
Gauze	Cleaning	

Tel.:8-37-451616

3.2 Special tools (to be provided by operator)

Name of tools	Usage	
Fiber cutter	Cutting off fiber cable	
Fiber stripper	Strip off protective coat of fiber cable	
Combo tools	Assembling FOSC	

3.3 Universal tools(to be provided by operator)

Name of tools	Usage and specification
Band tape	Measuring fiber cable
Pipe cutter	Cutting fiber cable
Electrical cutter	Take off protective coat of fiber cable
Combination pliers	Cutting off reinforced core
Screwdriver	Crossing/Paralleling screwdriver
Scissor	
Waterproof cover	Waterproof, dustproof
Metal wrench	Tightening nut of reinforced core


3.4 Splicing and testing instruments (to be provided by operator)

Name of instruments	Usage and specification
Fusion Splicing Machine	Fiber splicing
OT DR	Splicing testing
Provisional splicing tools	Provisional testing

Notice: The above-mentioned tools and testing instruments should be provided by the operators themselves.

Tel.:8-37-451616

#### 4. Installation flow chart

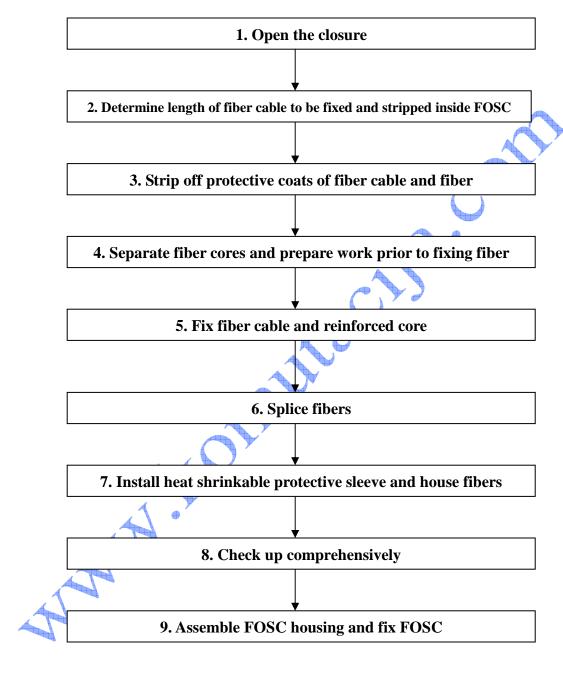

# 5. The process of installing FOSC.

#### 5.1 Step One - Open the closure

- 5.1.1 Cleaning the locale and determine where to install the FOSC and then place fiber cables required.
- 5.1.2 Check whether the main components and accessories have been well prepared inside the package.


Tel.:8-37-451616

#### 5.1.3 Open the closure

- ① demount hoop fixing bolt and pull hoop locking system out, then proceed in demounting the hoop.
- ② Pull the FOSC cover upwards out, installation could begin.

#### 5.1.4 See Drawing 1

**Important issues:** If the weather condition is not good enough, then a tent must be pitched for waterproof and dustproof.

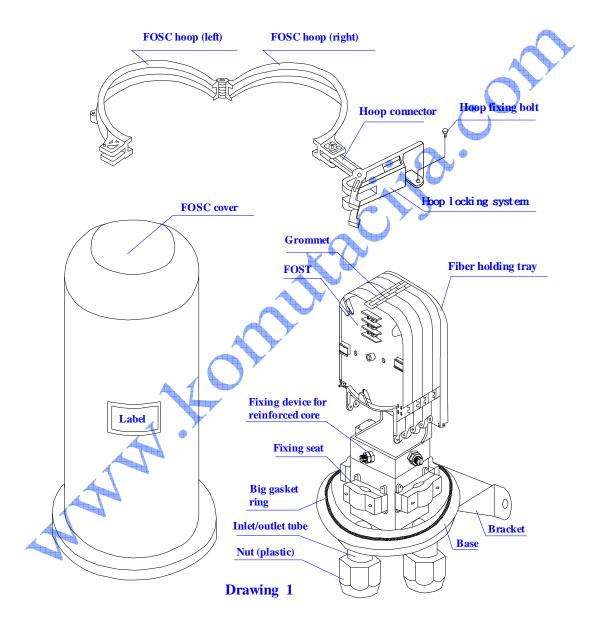

# 5.2 Step Two -Determine length of fiber cable to be fixed and stripped inside FOSC

5.2.1 ①. Fiber cable in 110mm length: the distance from small gasket ring to fiber cable

Tel.:8-37-451616


pressboard

- ②. Fiber cable in 1720mm length: it is used to be winded and spliced after stripping.
- ③. Fiber with protective coat in 120mm length: the distance from the fixing point of fiber cable to the fixing point of FOST (fiber optic splice tray).
- ④. Fiber in 1600mm length: after stripping off the protective coat, it is to be winded inside the FOST after splicing with other fibers

#### 5.2.2 See Drawing 2

**Important issues:** 


- 1. Reserve enough length of fiber cable to be spliced.
  - Stripping length also could be decided by customers according to installation requirement

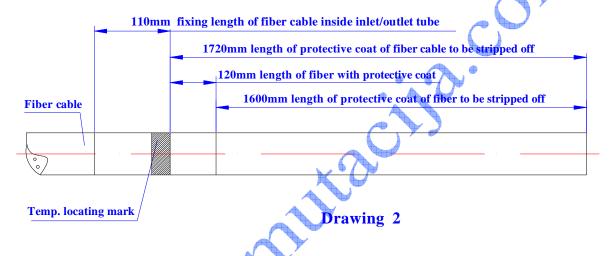

#### 5.3 Step Three –Strip off protective coat of fiber cable and fiber

- 5.3.1 Strip off protective coat of fiber cable from the temp. locating mark with the cutter and the stripper, please refer to Drawing 2 for stripping length. Stripping length also could be decided according to installation requirement
- 5.3.2 See Drawing 3.

**Important issues:** If it is difficult to pull all the protective coat of fiber cable at one time, strip it off section by section to avoid fiber breakage.

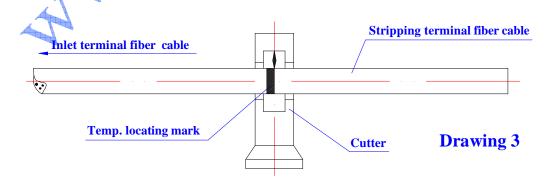

Tel.:8-37-451616


#### 5.4 Step Four – Separate fiber cores and prepare work prior to fixing fiber cable.

- 5.4.1 Wind 2 layers of insulation tape on protective coat of fiber core for protection.

  Meanwhile, get rid of the stuffing to separate fiber core and clean them. Form a ring with the diameter of 100mm or so and fix it on the fiber cable temporarily by adhesive tape.
- 5.4.2 Reserve reinforced core in 50mm length and cut off the unnecessary ones.
- 5.4.3 See Drawing 4.

Important issues: Inlet/outlet tubes are to be selected accurately to make it easy for splicing ANN. KOMMILIA CIJA. and sealing.

Tel.:8-37-451616

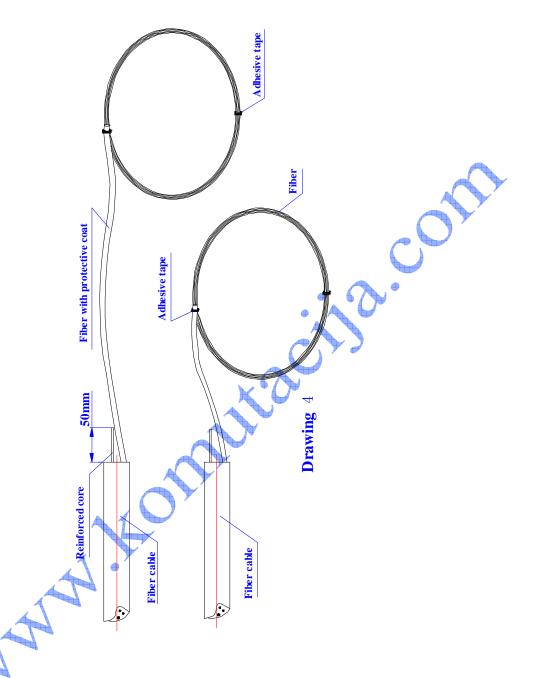


#### 5.5 Fix reinforced core, and pyrocondense, fix and seal fiber cable.

- 5.5.1 This FOSC is provided with 4 inlet/outlet tubes, which suits for fiber cable with max. diameter φ 16mm.
- 5.5.2 After deciding number of fiber cable inlet/outlet, demount the nut, gasket and gasket ring of the corresponding inlet/outlet tubes according to the diameters of fiber cables actually to be installed, insert them into fiber cable in sequence, then insert fiber cable into inlet/outlet cable, tighten the nut in order to seal properly.
- 5.5.3 While diameter is small, enlarge the diameter with seal tape at fixing position of small gasket ring, of which the perimeter is to be measured with measuring paper.

Tel.:8-37-451616

- 5.5.4 Fix fiber cable to the fixing seat, press it with the pressboard. While diameter is small, enlarge the diameter with insulation tape at the fixing position of fixing seat.
- 5.5.5 Demount the nut of fixing device of reinforced core with special wrench (plastic one), set the reinforced core into fixing slot, tighten the nut, retighten it with metal wrench (metal wrench to be provided by operator).
- 5.5.6 See Drawing 5

**Important issue**: Fixing nut of reinforced core should be tightened.

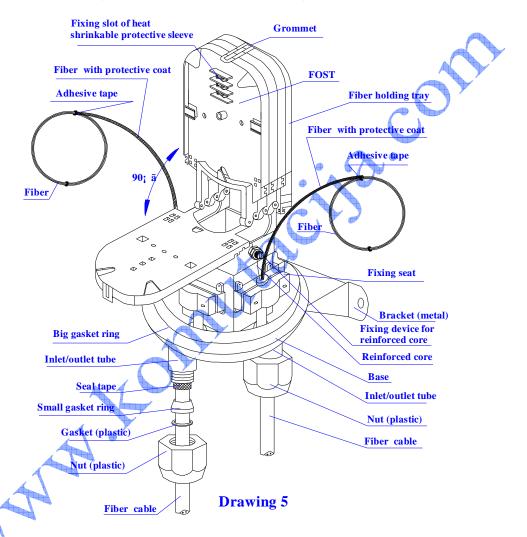

# 5.6 Step Six - Splice fibers

5.6.1 Follow user manual of fusion splicing machine to splice fiber.

Important issue: pay attention to the twist and bend of fiber

#### 5.7 Step Seven -Install heat shrinkable protective sleeve and house fibers.


5.7.1 When having completed splicing the fibers, the first fiber ring should be housed on the farthest side of FOST, the remaining fiber should be winded, forming a ring with diameter not less than 80mm. then put it into FOST (Fiber Optic Splice Tray) together with heat shrinkable protective sleeve.

Tel.:8-37-451616

( Firstly fix heat shrinkable protective sleeve into the slot, then enlarge the diameter of fiber ring properly.)

#### 5.7.2 See Drawing 6

Important issue: pay attention to the twist and bend of fiber.

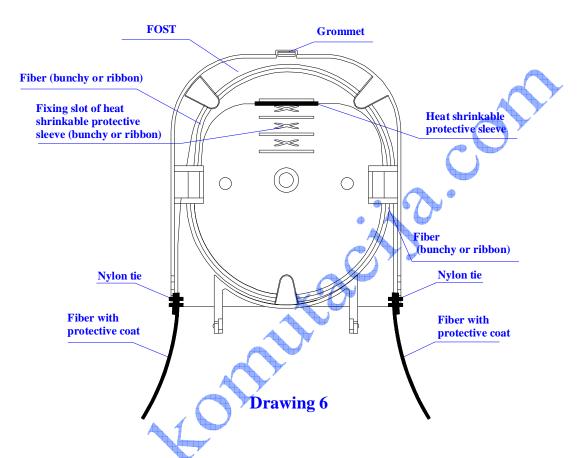


#### 5.8 Step Eight - Check up comprehensively

To ensure the technical requirements, the following instructions must be followed:

- 5.8.1 Fibers with protective coat are fixed with nylon tie at the entrance of FOST.
- 5.8.2 Grommet should be pressed from inside to outside in order to properly install FOST.
- 5.8.3 If there are fibers with protective coat reserved available, wind it into the fiber holding tray.
- 5.8.4 Check whether the internal tighteners and reinforced core are well tightened.
- 5.8.5 Check whether gasket ring is installed neatly and smoothly without any breakage. If not, level it up with seal tape.
- 5.8.6 See Drawing 7.

**Important issues:** If any problems occur, they should be solved right away.

Tel.:8-37-451616

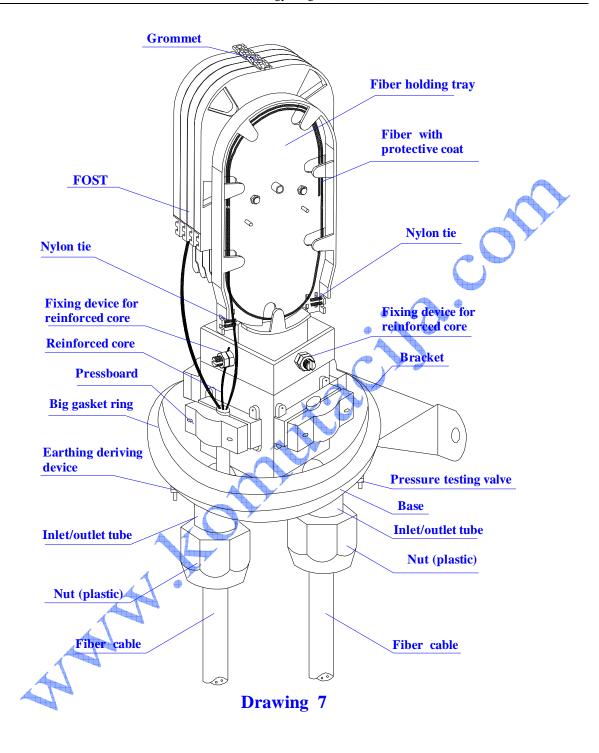

#### 5.9 Step Nine – Assemble FOSC housing and fix FOSC

- 5.9.1 Put FOSC cover on base directly.
- 5.9.2 Install plastic hoop between FOSC cover and the base, tighten hoop locking system, which is to be fixed by hoop fixing bolt then.
- 5.9.3 All nuts (plastic ones) of base need to be retightened once more.
- 5.9.4 FOSC installation


Tel.:8-37-451616

- ① Aerial application: fix metal hoop and transom to the pole. Please refer to Drawing 8
- ② Wall mounting application: fix the bracket on the wall with the bolt. (metal hoop is not required.)
- ③ Underground application: metal hoop is not required.

#### 5.9.5. See drawing 8

**Important issues**: 1. Pay attention while installing plastic hoop.

2. The specification of the bolt for wall-mounting is M8.

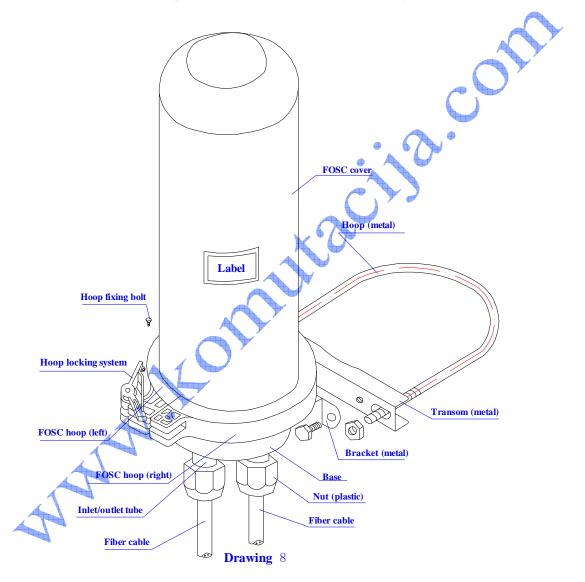

### 6. Fiber Optic Splice Closures (FOSC) inspecting and testing items

Tel.:8-37-451616

item  Routine test (Before leaving factory)  Each small package contains one fiber optic splice closure, together with its accessories, tools, installation manual and packing list.  Appearance  Intact in shape, no burrs, bubbles, chaps, pores, warps, impurities and other defects, all background colors should
Package  Each small package contains one fiber optic splice closure, together with its accessories, tools, installation manual and packing list.  Intact in shape, no burrs, bubbles, chaps, pores, warps, impurities and other defects, all background colors should
Package  Each small package contains one fiber optic splice closure, together with its accessories, tools, installation manual and packing list.  Intact in shape, no burrs, bubbles, chaps, pores, warps, impurities and other defects, all background colors should
Package closure, together with its accessories, tools, installation manual and packing list.  Intact in shape, no burrs, bubbles, chaps, pores, warps, impurities and other defects, all background colors should
manual and packing list.  Intact in shape, no burrs, bubbles, chaps, pores, warps, impurities and other defects, all background colors should
Appearance Intact in shape, no burrs, bubbles, chaps, pores, warps, impurities and other defects, all background colors should
Appearance impurities and other defects, all background colors should
he arran and continuel
be even and continual.
Sign There is a clear sign on the housing, such as name and
model of the product, etc.
The fibers reserved are to be winded in fiber optic splice
Fiber storage tray (FOST), the length of fibers housed in FOST is
>1.6m, the curved radius is >30mm. During the
installation and maintenance, there should be no
attenuation on fibers.
Electrical Inside FOSC: metallic components of fiber cables has the
iointing functions of electrical putting through, earthing
device connection and disconnecting. It is possible to install At least 3
earthing deriving device outside the housing sets
After sealing according to the stipulated operation sampled
Sealing procedures, the injected air pressure is 100KPa±5Kpa, each time
when immersed in clean water of normal temperature for At least 3 sets
15 minutes, there should be no air bubbles, then observed sampled each
for 24 hours, there should be no change of air pressure.
After reopening and resealing according to the stipulated
operation procedures, the injected air pressure is 100KPa
<b>Re-sealing</b> $\pm$ 5Kpa, when immersed in clean water of normal
performance temperature for 15 minutes, there should be no air
bubbles, then observed for 24 hours, there should be no
change of air pressure.
Bearing pull is $\geq 800$ N at axle orientation, there should
be no breakage on the housing.
Bearing pressure of 2000N/10cm for 1 minutes, there
Punching should be no breakage on the housing
Bearing impact energy of 16N • m, 3 times of impacts there
should be not breakage on the housing
The spot between the FOSC and seal fitting can bear At least 3 sets At least 3
<b>Bending</b> bending tension of 150N at bending angle of $\pm 45^{\circ}$ for 10 sampled each sets
circles, there should be no breakage on the housing time sampled

Tel.:8-37-451616

UAB "Žaliasis namas", Draugystės g.19, LT-51230, Kaunas

	Zanasis namas "Braugystes g.19, Er 31230, Raunas		
Torsion	Bearing torsion 50N•m, 10 circle at torsion angle±90 <sup>0</sup> ,		each time
Torsion	There should be no breakage on the housing.		
	Injected air pressure of 60KPa±5 KPa, the temperature		
	circle ranging from -40°C~+65°C, 10 times of the circular		
	tests (one circular consists of high temperature for 2 hours		
Temperature	+ indoor temperature for 2 hours + low temperature for 2		
circle	hours + indoor temperature for 2 hours ) when the		
	pressure declines, the amplitude is $\leq 5$ Kpa, immerse the		
	swatch in clean water of normal temperature for 15		
	minutes, there should be no air bubbles.		
	After sealing the FOSC according to the stipulated		<b>y</b>
Voltage	operation procedures, immerse it in clean water of normal		
resistance	temperature in 1.5m depth for 24 hours, there should be		
strength	no breakdown or arc over between the metallic		
suchgui	components of the FOSC, between metallic components	•	
	and the ground at DC 15KV for 1 minutes.		
Isolating	After sealing the FOSC according to stipulated operation		
resistance	procedure, immerse it in clean water in 1.5m depth for		
	24h, the isolating resistance between the metallic		
	components of the FOSC, between the metallic		
	components and the ground should be $\ge 2 \times 10^4 \text{M} \Omega$ .		

Tel.:8-37-451616